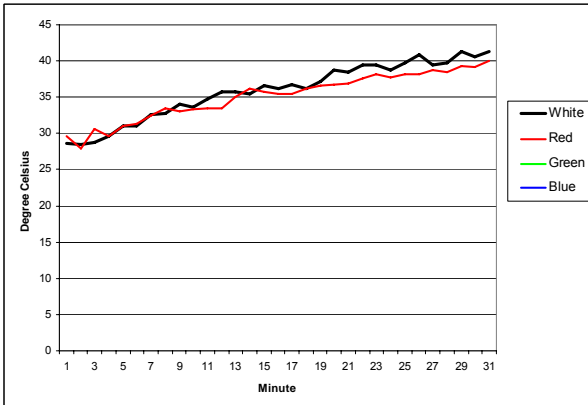
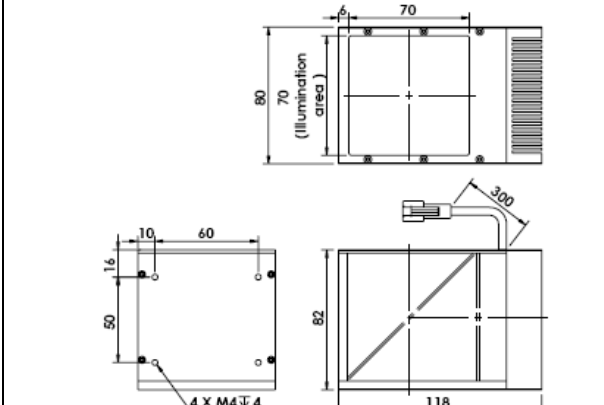


## Coaxial Light

**LFV-Si70N**


Operating Temperature after 30 minutes	Drawing
	

Mechanical Data (TYP)	
Casing Material	Aluminum + Diffuse + Mirror
Storage Temperature Range	Temp 0-35°C, Humidity 20-85%
Weight	Approx. 690g

Optical Data (TYP)	R	R24	W	G	B
Illumination (number of LED)	110	110	120		
Led Color	RED		WHITE	GREEN	BLUE
Wavelength	635nm		xy=(0.31,0.32)	525nm	470nm
Led Package	PLCC4		SMD		

Electrical Data (TYP)	R	R24	W	G/B
Operating Voltage	12V ± 2%	24V ± 2%	24V ± 2%	
Reverse Battery Protection	YES	YES	YES	
Supply Ripple Voltage	≤ Vs ± 5%	≤ Vs ± 5%	≤ Vs ± 5%	
Current Consumption	0.88A	0.44A	0.60A	0.40A
Power Consumption	10.56W	10.56W	14.4W	9.60W
Trigger Voltage	Continuous=12V Pulsing 12-24V 0-10% Duty Cycle	Continuous= 24V Pulsing 48V 0-10% Duty Cycle	Continuous= 24V Pulsing 48V 0-10% Duty Cycle	
Operating after 30 minutes	Approx. 40°C		Approx. 42°C	
Additional Cooling Method	Attached to large machine part			
Life span in continuous mode	20,000 hours (drop to 50% intensity) at 25°C			
Life span in strobe light mode	Est. >50,000 hours (drop to 50% intensity) at 25°C			
Connection	JST SMR-02V, 1:+,2:-	JST SMR-03V, 1:+,3:-	JST SMR-03V, 1:+,3:-	
Power Supply Selection	PSA-12V PSD-12V PSD-STL-12V	PSA-24V PSD-24V PSD-STL-48V	PSA-24V PSD-24V PSD-STL-48V	

Application (TYP)	
Recommended Working Distance	5-50mm